

HydroTron

Bore Pumps AC

HydroTron

Specification Pump

Pump casing: 304SS
 Shaft: 304SS
 Impellers: Polymethylene
 Diffusers: Polycarbonate
 Flange: Nema standard
 Floating stack design

Specification Motor

Motor casing: 304SS
 Shaft: 304SS
 Bearings: NSK
 Lubrication: Food grade oil
 Upper housing: 304SS plate

Motors

MODEL	MOTOR	TYPE	VOLTS
H370-2W	370 Watts	2 wire inbuilt capacitor	180-250V
H550-2W	550 Watts	2 wire inbuilt capacitor	180-250V
H750-2W	750 Watts	2 wire inbuilt capacitor	180-250V
H750-3W	750 Watts	3 wire and control box	180-250V
H1100-2W	1100 Watts	2 wire inbuilt capacitor	180-250V
H1100-3W	1100 Watts	3 wire and control box	180-250V
H1500-3W	1500 Watts	3 wire and control box	180-250V

Accessories


DESCRIPTION	PART NO
Splicing kits, 4 wire, suitable for 2-4mm ²	SKIT-01
Stainless steel cable 4mm ² per metre	SC-MT
Stainless steel cable grips 4mm	SCG-4
Bore cap 4", 5", 6", Outlet 1½"	BC-01

ELECTRICAL CABLE 3 WIRE & EARTH


Electrical cable 2.5mm ²	Elec Cable 2.5
Electrical cable 4mm ²	Elec Cable 4




30 litre/min pump

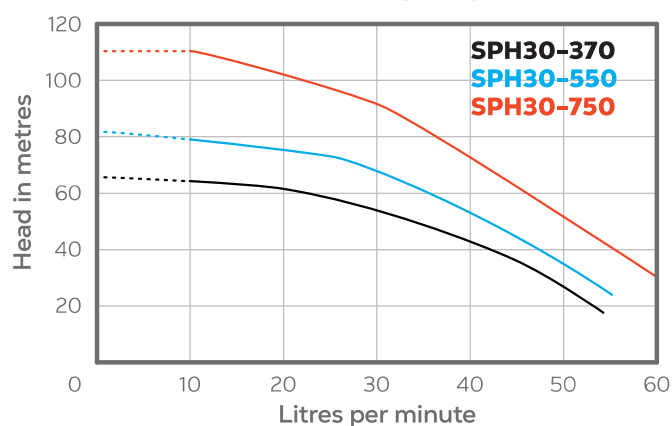

60 litre/min pump

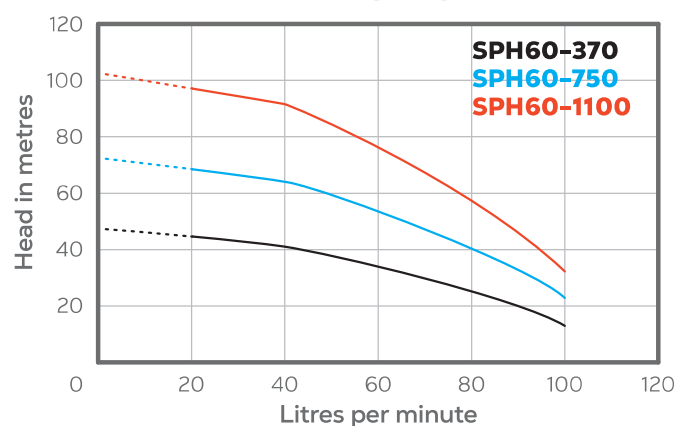

90 litre/min pump

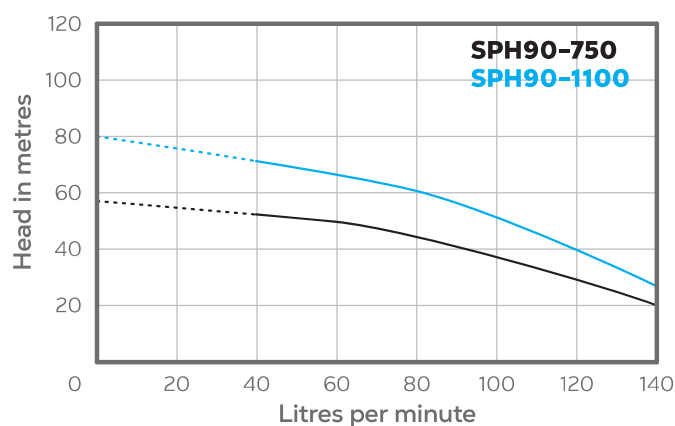

125 litre/min pump

