

Bore Hole

Submersible Bore Hole 4 inch

Orange
PUMPS



Pump Features

- > Floating stack impeller design
- > Hexagonal stainless steel shaft
- > Ceramic shaft sleeves
- > Cast stainless steel discharge port
- > Polymethylene glycol impellers
- > Polycarbonate diffusers
- > Built-in check valve
- > Robust, thick outer stainless steel casing
- > NEMA flange.



Pump Benefits

- > Sand and grit handling
- > Reduced shaft wear and tear
- > Corrosion-resistant materials
- > Smooth, efficient moulded surfaces
- > Replaceable parts.



Franklin Electric

Motor Features

- > Recognised and proven brand
- > 4 inch encapsulated motor
- > Hermetically sealed windings
- > Water lubrication
- > Pressure equalising diaphragm
- > Built-in lightning arrestors on single phase
- > Stainless steel splined shaft
- > Kingsbury type thrust bearing.



316 Stainless steel motors are also available.


Accessories

PART NO.	DESCRIPTION
SC-REEL	Stainless steel cable 4mm ² , 500m length
SC-MT	Stainless steel cable 4mm ² per metre
SCG-4	Stainless steel cable grip 4mm
SKIT-01	Electrical splice kit 4 wire, suitable for 2-4mm ²
BC-01	Bore cap 4", 5", 6" to suit 1½" poly

Bore Hole


Submersible Bore Hole 4 inch

30 Litre Pump

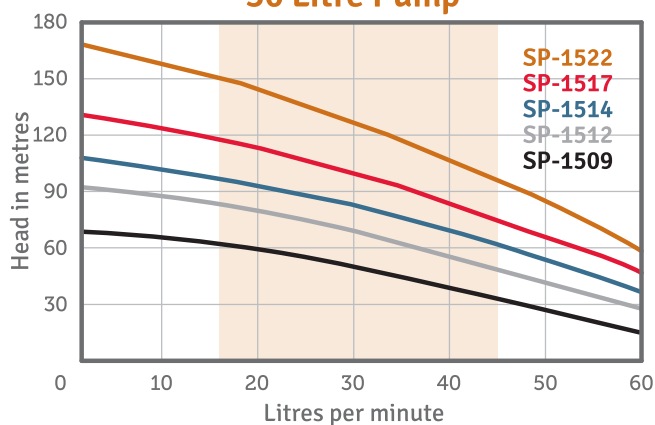


MODEL	TYPE	VOLTS	HP	KW	STAGES
SP-1509-2W	2 wire	230V	0.5	0.37	9
SP-1509-415		415V	0.5	0.37	9
SP-1512-2W	2 wire	230V	0.75	0.55	12
SP-1512-415		415V	0.75	0.55	12
SP-1514-2W	2 wire	230V	1.0	0.75	14
SP-1514-3W	3 wire	230V	1.0	0.75	14
SP-1514-415		415V	1.0	0.75	14
SP-1517-2W	2 wire	230V	1.5	1.1	17
SP-1517-3W	3 wire	230V	1.5	1.1	17
SP-1517-415		415V	1.5	1.1	17
SP-1522-3W	3 wire	230V	2.0	1.5	22
SP-1522-415		415V	2.0	1.5	22

60 Litre Pump

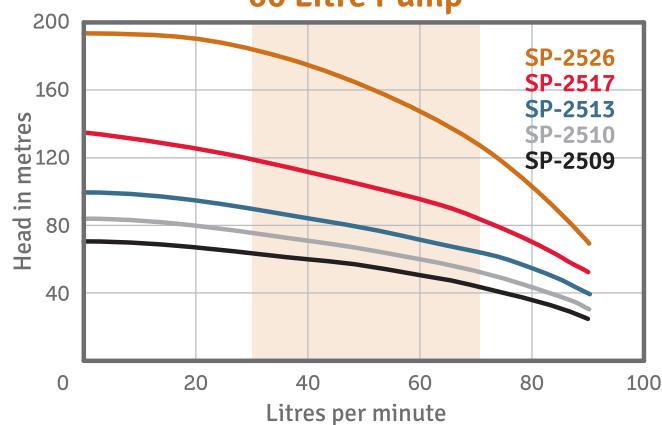


MODEL	TYPE	VOLTS	HP	KW	STAGES
SP-2509-2W	2 wire	230V	0.75	0.55	9
SP-2509-415		415V	0.75	0.55	9
SP-2510-2W	2 wire	230V	1.0	0.75	10
SP-2510-3W	3 wire	230V	1.0	0.75	10
SP-2510-415		415V	1.0	0.75	10
SP-2513-2W	2 wire	230V	1.5	1.1	13
SP-2513-3W	3 wire	230V	1.5	1.1	13
SP-2513-415		415V	1.5	1.1	13
SP-2517-3W	3 wire	230V	2.0	1.5	17
SP-2517-415		415V	2.0	1.5	17
SP-2526-3W	3 wire	230V	3.0	2.2	26
SP-2526-415		415V	3.0	2.2	26

80 Litre Pump

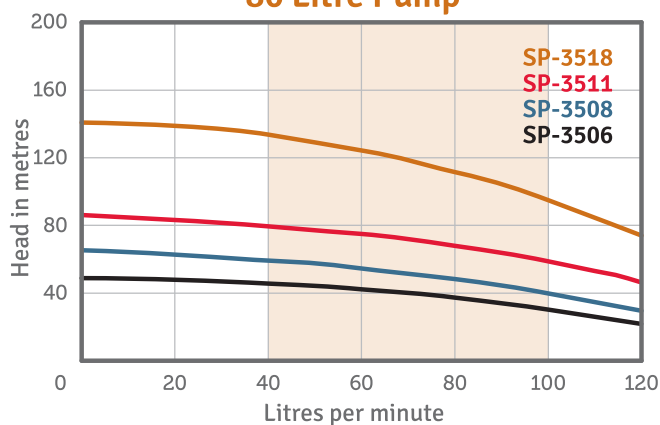

MODEL	TYPE	VOLTS	HP	KW	STAGES
SP-3506-2W	2 wire	230V	1.0	0.75	6
SP-3506-3W	3 wire	230V	1.0	0.75	6
SP-3506-415		415V	1.0	0.75	6
SP-3508-3W	3 wire	230V	1.5	1.1	8
SP-3508-2W	2 wire	230V	1.5	1.1	8
SP-3508-415		415V	1.5	1.1	8
SP-3511-3W	3 wire	230V	2.0	1.5	11
SP-3511-415		415V	2.0	1.5	11
SP-3518-3W	3 wire	230V	3.0	2.2	18
SP-3518-415		415V	3.0	2.2	18

130 Litre Pump

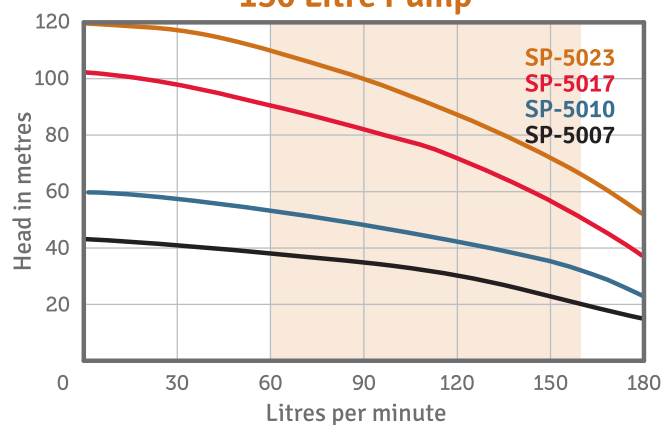

MODEL	TYPE	VOLTS	HP	KW	STAGES
SP-5007-2W	2 wire	230V	1.5	1.1	7
SP-5007-3W	3 wire	230V	1.5	1.1	7
SP-5007-415		415V	1.5	1.1	7
SP-5010-3W	3 wire	230V	2.0	1.5	10
SP-5010-415		415V	2.0	1.5	10
SP-5017-3W	3 wire	230V	3.0	2.2	17
SP-5017-415		415V	3.0	2.2	17
SP-5023-3W	3 wire	230V	5.0	3.7	23
SP-5023-415		415V	5.0	3.7	23